






NRG Zone 4 - 50/50/40

SKU: NRGZ6-32/32/28

Manifold with 6 x 2" Connections on the sides, 4 x 1½" connections on the bottom and 3 x 1¼" connections on the top

Product code explanation

NRGZ | 4 | 50 | 50 | 40

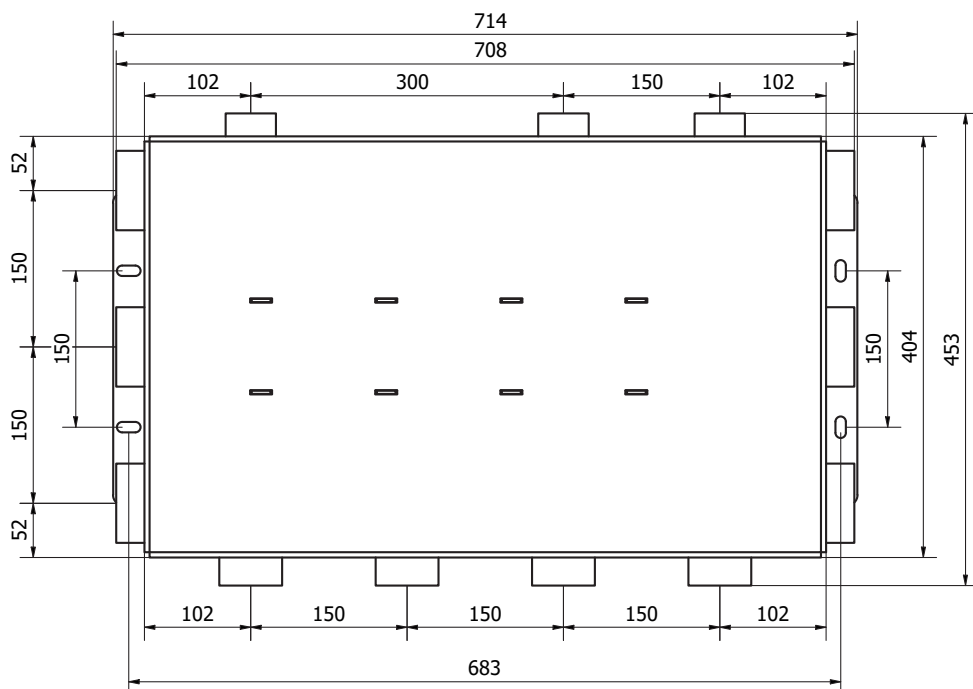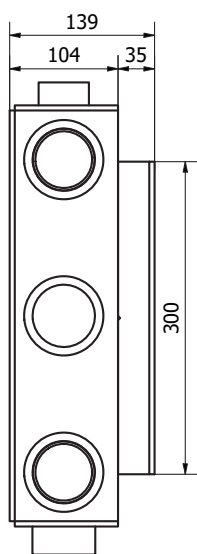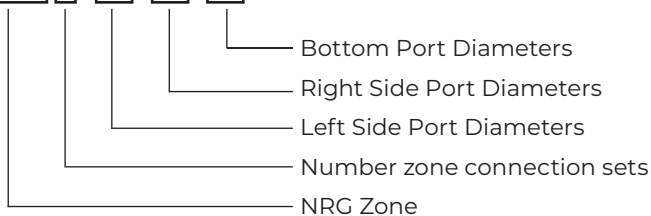

NRG ZONE ADVANTAGES:

- Usable for single appliance systems or interlinking multiple heat inputs from boilers, heat pump etc.
- Used to interlink appliances to controlled zones.
- Built-in; bypass, air separation function and system neutral point.
- Simplifies solid fuel installation and systems interlinking
- Trouble-free operation with increased safety and system efficiency
- Simple or complex systems for domestic or commercial applications designed in minutes
- Reduce installation labour, materials and over- all system costs.
- Easily configured as a chemical dosing vessel
- Optimise system conditions for, heat pumps, condensing oil or gas boilers and solid fuel appliances to improve efficiency and reduce running costs.

