





NRG Zone 5 - 28/28/28


SKU: NRGZ5-28/28/28

Manifold with 6×1 " Connections on the sides, 6×1 " connections on the bottom and 3×1 " connections on the top - Insulated.

Product code explanation

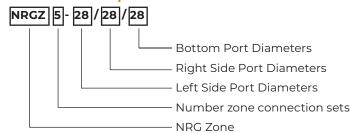

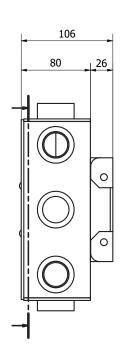

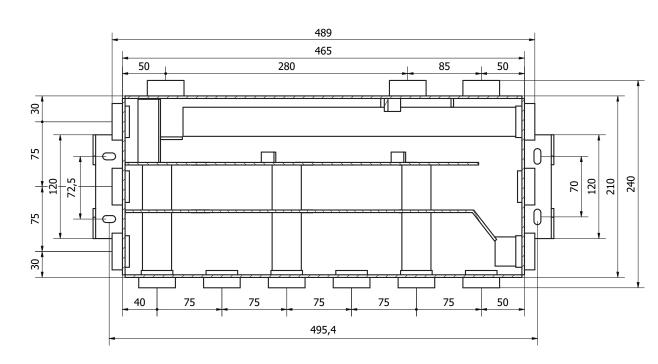

NRG ZONE ADVANTAGES:

- Usable for single appliance systems or interlinking multiple heat inputs from boilers, heat pump etc.
- $\boldsymbol{\cdot}$ Used to interlink appliances to controlled zones.
- · Built-in; bypass, air separation function and system neutral point.
- · Simplifies solid fuel installation and systems interlinking
- · Trouble-free operation with increased safety and system efficiency
- · Standard units are fully insulated
- Simple or complex systems for domestic or commercial applications designed in minutes
- · Reduce installation labour, materials and over- all system costs.
- · Easily configured as a chemical dosing vessel
- Optimise system conditions for, heat pumps, condensing oil or gas boilers and solid fuel appliances to improve efficiency and reduce running costs.



