



NRG Zone 8 - 50/50/40

SKU: NRGZ8-50/5040

Manifold with 6 x 2" Connections on the sides, $12 \times 1 \frac{1}{2}$ " connections on the bottom and $3 \times 1 \frac{1}{4}$ " connections on the top

Product code explanation

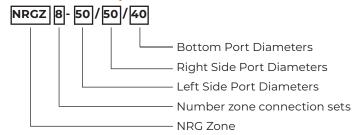

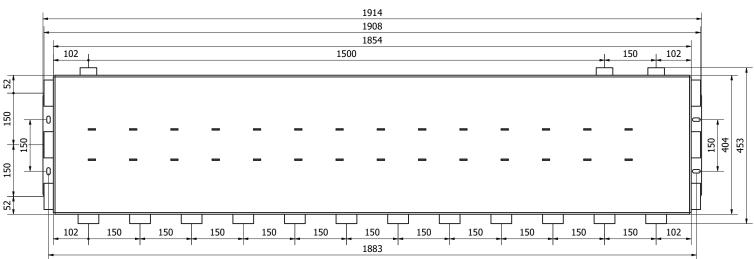

NRG ZONE ADVANTAGES:

- Usable for single appliance systems or interlinking multiple heat inputs from boilers, heat pump etc.
- · Used to interlink appliances to controlled zones.
- · Built-in; bypass, air separation function and system neutral point.
- · Simplifies solid fuel installation and systems interlinking
- \cdot Trouble-free operation with increased safety and system efficiency
- Simple or complex systems for domestic or commercial applications designed in minutes
- · Reduce installation labour, materials and over- all system costs.
- · Easily configured as a chemical dosing vessel
- Optimise system conditions for, heat pumps, condensing oil or gas boilers and solid fuel appliances to improve efficiency and reduce running costs.



